


USER MANUAL

PR SERIES POWERED SPEAKER SYSTEM

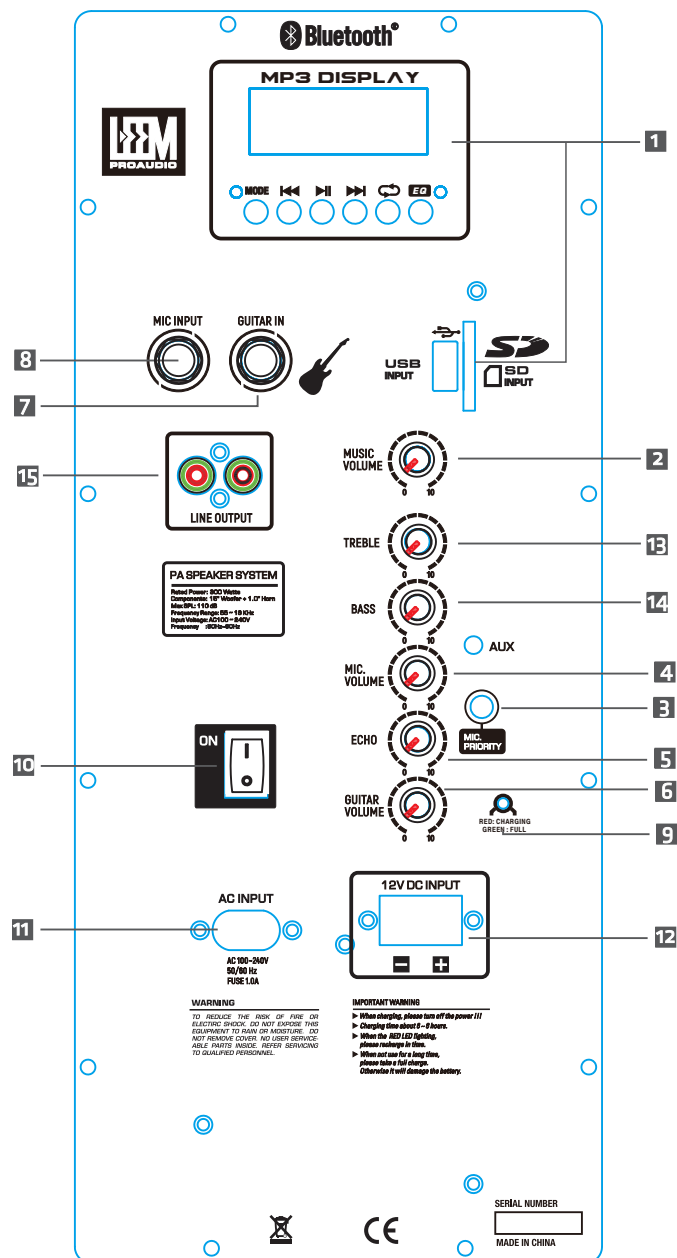

CONTROL PANEL

1. MP3 PLAYER

Insert USB or SD , Bluetooth, FM, Line in...

2. MASTER

The knob adjust the volume of the Mp3 Player .

3. MIC.PRIORITY

When you speaking by the Microphone, the system reduces the volume of the music, The audience can hear you clearly

4. MIC. VOLUME

The knob adjust the volume of the Microphones, included the Wireless mic. and Wired microphone. Take the knob at mid position if you use the Microphone.

5. ECHO

The knob adjust the delay volume of the Microphones, included the Wireless mic. and Wired microphone.

6. Guitar LEVEL

The knob adjust the volume of the Guitar or another musical instruments.

7. Guitar INPUT

The socket for the Guitar or another musical instruments.

8. MIC. INPUT

The socket for the Microphone.

9. CHARGING OR BAT. FULL

When you charging the light is red, when the light is green, the battery is full

10. POWER SWITCH

Turn on turn off the power of the speaker

11. AC INPUT

When the battery is low, insert the power cord to recharge. (Please turn off the power and recharging)

12. DC 12V INPUT

When the battery is low, you can use the external 12V power supply. But do not get the wrong polarity, red to the positive, black to the negative. If the connection is wrong, it will cause the amplifier to burn.

13. TREBLE

The knob adjust the treble of the speaker system

14. BASS

The knob adjust the bass of the speaker system


15. LINE OUTPUT

Two RCA connectors for OUTPUTS

IMPORTANT WARNING

- Cuando este cargando la batería Apagar el equipo
- Tiempo de carga suficiente de 6-8 horas
- Cuando la luz de batería baja encienda ponga a recargar nuevamente
- Mantener cargando por mas del tiempo sugerido puede dañar la batería

2. WIRING

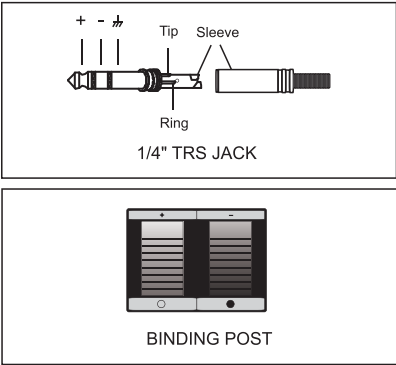

SPECIFICATIONS

Model	PR-12HR	PR-15HR
Configuration	12" 2-way	15" 2-way
Frequency Range (-10dB)	60~18000Hz	55~18000Hz
MAX Power	50Watts	60Watts
Nominal Impedance	4 Ohms	4 Ohms
Sensitivity (1W@1m)	93 dB	95 dB
Crossover Frequency	3.0KHz	3.0KHz
Maximum SPL	101 dB	103 dB
Input Connectors	XLR,JACK,RCA	XLR,JACK,RCA
Dimensions (H×W×D)	615x410x330mm	715x485x395mm
Net Weight	10Kgs	14.5Kgs

When open the carton box, please check the parts as below:

- SPEAKER x 1
- POWER CORD x 1
- WIRELESS MICROPHONE x 2
- MANUAL x 1

PORTABLE HIGH POWER SPEAKER SYSTEM

Features:

Enclosure adopted a high impact polymer,injection molded shaping,It has high intensity and light weight, also with wheel and top handle. easy to carry it. But carry it carefully,don't drop it.

Woofer speaker make a high powered pro-speaker,It has wide range, low distortion,high senditivity,adopted a steel frame,It has non-mechanical resonance.

Driver selected a titanium diaphragm,and light mass voice coil,make it high frequency reached 20,000 Hz.

The new A.A.S.S.(Automatic amplitude servo system) processor ensures total protection of the tranducers and improvement of the acoustic response.