

'6ixty5ive Overdrive

Owner's Manual

NUX

Reissue Series

The NUX '6ixty5ive Overdrive pedal from the Reissue Series offers you the punchy clear tone of the Blackface Fender amps from the 60's. It's an easy to handle overdrive which keeps the characteristics of the guitar with great sustain and natural compression.

NUX '6ixty5ive Overdrive is inspired by VEMURAM Jan Ray.

Overview

- Classic Blackface Overdrive Tone
- Analog Circuit with JRC4558 Gain Stage
- OP AMP Simulates the Characteristic Overdrive of Blackface Tube Amplifiers
- Saturation Trimmer
- True-bypass Hardware Switching

Specifications


- Input impedance: 1M Ohms
- Output impedance: 10k Ohms
- Power: 9V battery or external AC adaptor delivering 9V DC regulated minimum 300mA ($\ominus \rightarrow \oplus$)
- Dimensions: 121(L) x 77(W) x 48(D) mm
- Weight: 230g

1. Do not place near heat sources, such as radiators, heat registers, or appliances which produce heat.
2. Guard against objects or liquids entering the enclosure.
3. Refer all servicing to qualified service personnel.
4. Prolonged listening at high volume levels may cause irreparable hearing loss and/or damage. Always be sure to practice "safe listening".

Follow all instructions and heed all warnings

KEEP THESE INSTRUCTIONS!

Product Interface

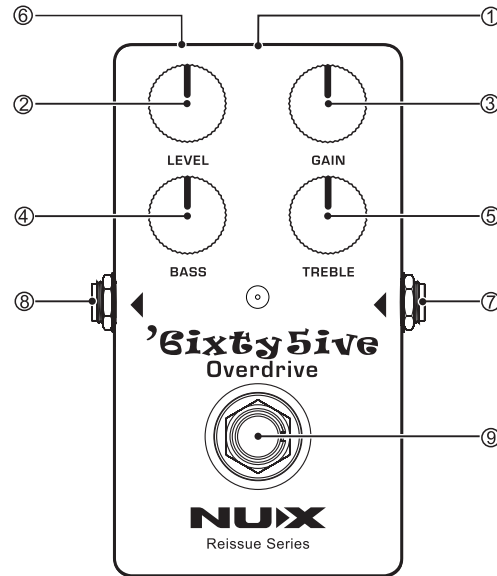

1. POWER Jack

Use a regular 9V DC adaptor with Negative Tip to power this pedal. It's highly recommended using the optional NUX ACD-006A adaptor. Using an incompatible adaptor may cause noise or malfunction.

2. LEVEL Knob

Sets the output level of this pedal.

3. GAIN Knob

Sets the preamp gain. Turn it up will increase the overdrive amount.

4. BASS Knob

Controls the low frequency.

5. TREBLE Knob

Controls the high frequency.

6. TRIM Pot

Controls the saturation.

7. INPUT Jack

Connect your guitar into this jack. Plugging in this jack switch on the power whether the effect is engaged or disengaged. When not using this pedal, disconnect the cable from this jack to save battery life.


8. OUTPUT Jack

Connect an amplifier into this jack.

9. Footswitch

Engage / Disengage the effect.

Installing The Battery



A battery is supplied with the unit. Connect the snap cord to the battery and insert the battery as shown in the drawing. When the battery runs down the sound will change. In such case please replace with new battery. The power comes on when you insert the plug into the INPUT jack. The use of an AC adaptor is recommended as the unit's power consumption is relatively high.

Accessories

- 9V battery
- Owner's manual
- NUX sticker

WARNING!-IMPORTANT SAFETY INSTRUCTIONS BEFORE CONNECTING, READ INSTRUCTIONS

WARNING: To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.



The lightning symbol within a triangle means "electrical caution!" It indicates the presence of information about operating voltage and potential risks of electrical shock.

CAUTION: To reduce the risk of fire or electric shock, do not remove screws. No user-serviceable parts inside. Refer servicing to qualified service personnel.



The exclamation point within a triangle means "caution!" Please read the information next to all caution signs.



www.nuxaudio.com
Made in China

*Specifications and features are subject to change without notice.